

/

PC

Parameter


	SY-BZ-ACJ(EII)-4311X e	ж
	DC36V	
	0.3W	
	0.5W	
	ч 15cd/m>~150cd/m>	
	ч 50cd/m>~300cd/m>	
/	LED	
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W	
	90min	
	IP30	
	-10 1 й 55 1	
	<95% RH	
	GB 17945-2024	
	349mm і 131mm і 10mm	

/

PC

Parameter

	SY-BZ-ACJ(EII)-4311X e	ж
	DC36V	
	0.3W	
	0.5W	
	ч 15cd/m>~150cd/m>	
	ч 50cd/m>~300cd/m>	
/	LED	
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W	
	90min	
	IP30	
	-10 1 й 55 1	
	<95% RH	
	GB 17945-2024	
	349mm і 131mm і 10mm	

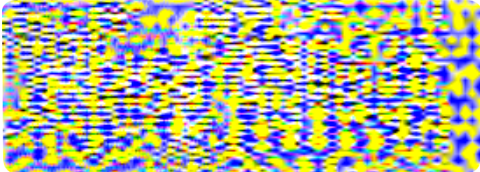

/

PC

Parameter

	SY-BZ-ACJ(EII)-4311X e	ж
	DC36V	
	0.3W	
	0.5W	
	ч 15cd/m>~150cd/m>	
	ч 50cd/m>~300cd/m>	
/	LED	
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W	
	90min	
	IP30	
	-10 1 й 55 1	
	<95% RH	
	GB 17945-2024	
	349mm і 131mm і 10mm	



/

PC

Parameter

	SY-BZ-ACJ(EII)-4311X e	ж
	DC36V	
	0.3W	
	0.5W	
	ч 15cd/m>~150cd/m>	
	ч 50cd/m>~300cd/m>	
/	LED	
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W	
	90min	
	IP30	
	-10 1 й 55 1	
	<95% RH	
	GB 17945-2024	
	349mm і 131mm і 10mm	



/

PC

Parameter

	SY-BZ-ACJ(EII)-4311X e	/ ж
	DC36V	
	0.3W	
	0.5W	
	ч 15cd/m>~150cd/m>	
	ч 50cd/m>~300cd/m>	
/	LED	
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W	
	90min	
	IP30	
	-10 1 й 55 1	
	<95% RH	
	GB 17945-2024	
	349mm і 131mm і 10mm	

/

PC

Parameter

	SY-BZ-ACJ(EII)-4311Y e	ж
	DC36V	
	0.3W	
	0.5W	
	ч 15cd/m>~150cd/m>	
	ч 50cd/m>~300cd/m>	
/	LED	
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W	
	90min	
	IP65	
	-10 1 й 55 1	
	<95% RH	
	GB 17945-2024	
	365mm і 150mm і 16mm	



/

PC

Parameter

	SY-BZ-ACJ(EII)-4311Y e	/	ж
	DC36V		
	0.3W		
	0.5W		
	ч 15cd/m>~150cd/m>		
	ч 50cd/m>~300cd/m>		
/	LED		
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W		
	90min		
	IP65		
	-10 1 й 55 1		
	<95% RH		
	GB 17945-2024		
	365mm і 150mm і 16mm		



/

PC

Parameter

	SY-BZ-ACJ(EII)-4311Y e	/	ж
	DC36V		
	0.3W		
	0.5W		
	ч 15cd/m>~150cd/m>		
	ч 50cd/m>~300cd/m>		
/	LED		
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W		
	90min		
	IP65		
	-10 1 й 55 1		
	<95% RH		
	GB 17945-2024		
	365mm і 150mm і 16mm		



/

PC

Parameter

	SY-BZ-ACJ(E2I)-4312X e	/	ж
	DC36V		
	0.3W		
	0.5W		
	ч 15cd/m>~150cd/m>		
	ч 50cd/m>~300cd/m>		
/	LED		
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W		
	90min		
	IP30		
	-10 1 й 55 1		
	<95% RH		
	GB 17945-2024		
	349mm і 131mm і 15mm		



/

PC

Parameter

	SY-BZ-ACJ(E2I)-4312X e	/	ж
	DC36V		
	0.3W		
	0.5W		
	ч 15cd/m>~150cd/m>		
	ч 50cd/m>~300cd/m>		
/	LED		
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W		
	90min		
	IP30		
	-10 1 й 55 1		
	<95% RH		
	GB 17945-2024		
	349mm і 131mm і 15mm		



/

PC

Parameter

	SY-BZ-ACJ(E2I)-4312X e	/	ж
	DC36V		
	0.3W		
	0.5W		
	ч 15cd/m>~150cd/m>		
	ч 50cd/m>~300cd/m>		
/	LED		
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W		
	90min		
	IP30		
	-10 1 й 55 1		
	<95% RH		
	GB 17945-2024		
	349mm і 131mm і 15mm		



/

PC

Parameter

	SY-BZ-ACJ(E2I)-4312X e	/	ж
	DC36V		
	0.3W		
	0.5W		
	ч 15cd/m>~150cd/m>		
	ч 50cd/m>~300cd/m>		
/	LED		
	2.6~2.8V 0.06W й 2.0~2.1V 0.04W		
	90min		
	IP30		
	-10 1 й 55 1		
	<95% RH		
	GB 17945-2024		
	349mm і 131mm і 15mm		



Parameter	
	SY-DM-ACJ-41630 e ж
	DC36V
	0.2W
	0.4W
	ч 15cd/m>~150cd/m> ч 50cd/m>~300cd/m>
/	LED
	DC2.6V~DC2.8V 0.2W
	90min
	IP67
	-10 ℃ ÷ 55 ℃
	<95% RH
	GB 17945-2024
	Ú18

Parameter

	SY-C-T-4800
	17 1280 11024px
	176~264VAC 50Hz
	12V 7Ah
	12
	60000
	IP33
	й е ж ш
	ш
	/ й / й



Parameter

	SY-C-T-4801
	4.3 480 1272px
	176~264VAC 50Hz
	3.2V 1800mAh
	11
	3200
	IP33
	й ш



300W

Parameter

	SY-D-AC(DC36V/0.3kVA)-4880
	36V
	176~264VAC 50Hz
	4
	90min
	1 12V 65Ah
	IP65



500W

Parameter

	SY-D-AC(DC36V/0.5kVA)-4881
	36V
	176~264VAC 50Hz
	8
	90min
	1 12V 100Ah
	IP65

1000W

Parameter

	SY-D-AC(DC36V/1kVA)-4882
	36V
	176~264VAC 50Hz
	8
	90min
	2 12V 100Ah
	IP65

